




### Key Performance

- Ideal for commercial sheetfed applications
- Strong Chemical resistance
- Very high durability
- High printing quality

### MAIN APPLICATION

#### Sheetfed

**Printec 574 is available in 4 ply (1,97/1,98 mm) thickness**

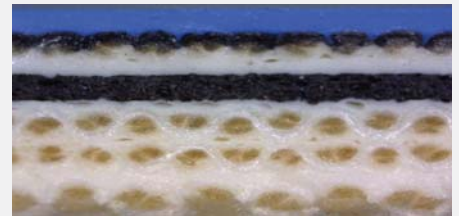

**Printec 574**

### The product at a glance

<b>INK COMPATIBILITY</b>	Hybrid
<b>PRINTING SURFACE COLOUR</b>	Blue
<b>THICKNESS (mm)</b>	1,97/1,98
<b>AVERAGE LOAD VALUE N/cm<sup>2</sup> @ 0,20 mm Indentation</b>	150
<b>SURFACE ROUGHNESS (µm)</b>	0,70 to 1,30
<b>ELONGATION (%)</b>	< 2
<b>TENSILE STRENGTHS (kgf/cm)</b>	> 71,5
<b>WATER &amp; SOLVENT PROTECTION</b>	No
<b>ADDITIONAL INFORMATION</b>	
<b>APPLICATIONS</b>	Sheetfed

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION  
PLEASE REFER TO YOUR SALES MANAGER  
OR EMAIL US AT: [printing@trelleborg.com](mailto:printing@trelleborg.com)**