



Rollin® Graffity Plus


Key performance

- Excellent half tone reproduction and reduced gain on press
- Positive paper feed
- Implements all benefits of **Dynatech System:**
 - Better vibration absorption
 - Less gears streaking marks
 - Higher paper smash resistance
 - Blanket consistency
 - Excellent rebondaubility

MAIN APPLICATION

Newspaper Coldset

Rollin Graffity Plus is available in 3-ply, 1,95 thickness.

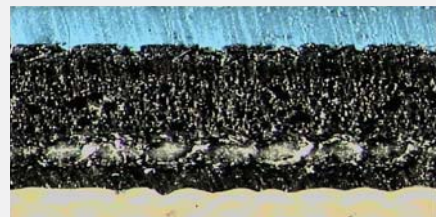

Rollin Graffity Plus



The product at a glance

INK COMPATIBILITY	Hybrid
PRINTING SURFACE COLOUR	Dark blue
THICKNESS (mm)	1,95
AVERAGE LOAD VALUE N/cm² @ 0,23 mm Indentation	250
SURFACE ROUGHNESS (Ra micron)	0,8
ELONGATION (%)	<0,9
TENSILE STRENGTHS (N/mm)	>60
FEED FEATURES	Positive
WATER & SOLVENT PROTECTION	Yes
NEW TECHNOLOGY	Dynatech System
ADDITIONAL INFORMATION	
APPLICATIONS	Suitable for high speed newspaper applications

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION
PLEASE REFER TO YOUR SALES MANAGER
OR EMAIL US AT: printing@trelleborg.com**