



# vulcan<sup>®</sup> 714Strip


## Key performance

- Dedicated blanket for strippable and varnishing applications
- Easy to strip due to the special compressible layer
- Suitable for flood, spot, knock out coating applications


## MAIN APPLICATION

Commercial Sheetfed, Packaging

**Vulcan 714Strip is available in 4-ply, (1,96 mm) thickness.**



Standard

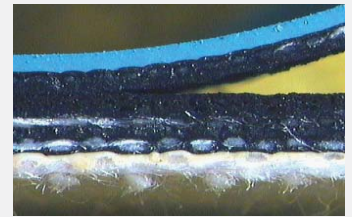

Vulcan 714Strip



## The product at a glance

<b>INK COMPATIBILITY</b>	Conventional
<b>PRINTING SURFACE COLOUR</b>	Blue
<b>THICKNESS (mm)</b>	1,96
<b>AVERAGE LOAD VALUE N/cm2 @ 0,23 mm Indentation</b>	250
<b>SURFACE ROUGHNESS (Ra micron)</b>	0,6
<b>ELONGATION (%)</b>	<0,9
<b>TENSILE STRENGTHS (N/mm)</b>	>60
<b>WATER &amp; SOLVENT PROTECTION</b>	No
<b>ADDITIONAL INFORMATION</b>	
<b>USER FRIENDLY</b>	Easy and clean strip

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION  
PLEASE REFER TO YOUR SALES MANAGER  
OR EMAIL US AT: [printing@trelleborg.com](mailto:printing@trelleborg.com)**