



# vulcan<sup>®</sup> Royal Form


## Key performance

- Very speciale compressible layer
- Sticky back blanket
- High print quality
- Edge marking resistant
- Increased blanket lifetime
- Suitable for label and envelope printings


## MAIN APPLICATION

Continuous form

**Vulcan Royal Form available in 2 ply, (0,90/0,95/1,00/1,05 mm) thickness.**



Vulcan Royal Form

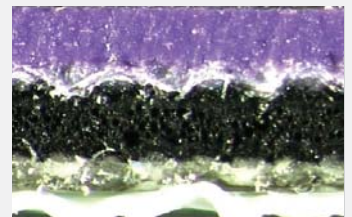

Vulcan Royal Form UV

## ✓ The product at a glance

<b>INK COMPATIBILITY</b>	Conventional
<b>PRINTING SURFACE COLOUR</b>	Blue
<b>THICKNESS (mm)</b>	0,90/0,95/1,00/1,05
<b>AVERAGE LOAD VALUE N/cm2 @ 0,10 mm Indentation</b>	250
<b>SURFACE ROUGHNESS (Ra micron)</b>	0,8
<b>ELONGATION (%)</b>	NA
<b>TENSILE STRENGTHS (N/mm)</b>	NA
<b>WATER &amp; SOLVENT PROTECTION</b>	NA
<b>ADDITIONAL INFORMATION</b>	
<b>TOP FACE COMPOUND</b>	UV inks version available

**FOR ANY FURTHER DETAILS AND FOR A QUOTATION  
PLEASE REFER TO YOUR SALES MANAGER  
OR EMAIL US AT: [printing@trelleborg.com](mailto:printing@trelleborg.com)**